

BERES BLACK



BERES AIZU



BERES

HONMA




TECHNOLOGY

DRIVER

NEW Radial L-Cup Face, NEW Triple Sole Slot, and NEW Ti811 Thin Crown Design combine to offer the very best in BERES speed, high-launch, low-spin performance with added draw bias for more forgiveness.

FAIRWAYS & UTILITIES

Featuring NEW Triple Sole Slot, Thin Crown Design, a Thin and Flexible Face, and Low-CG weight distribution designed independently for each head, BERES Fairways and Hybrids offer unprecedented distance through ample speed, high launch trajectory, and easy to play draw-biased forgiveness.

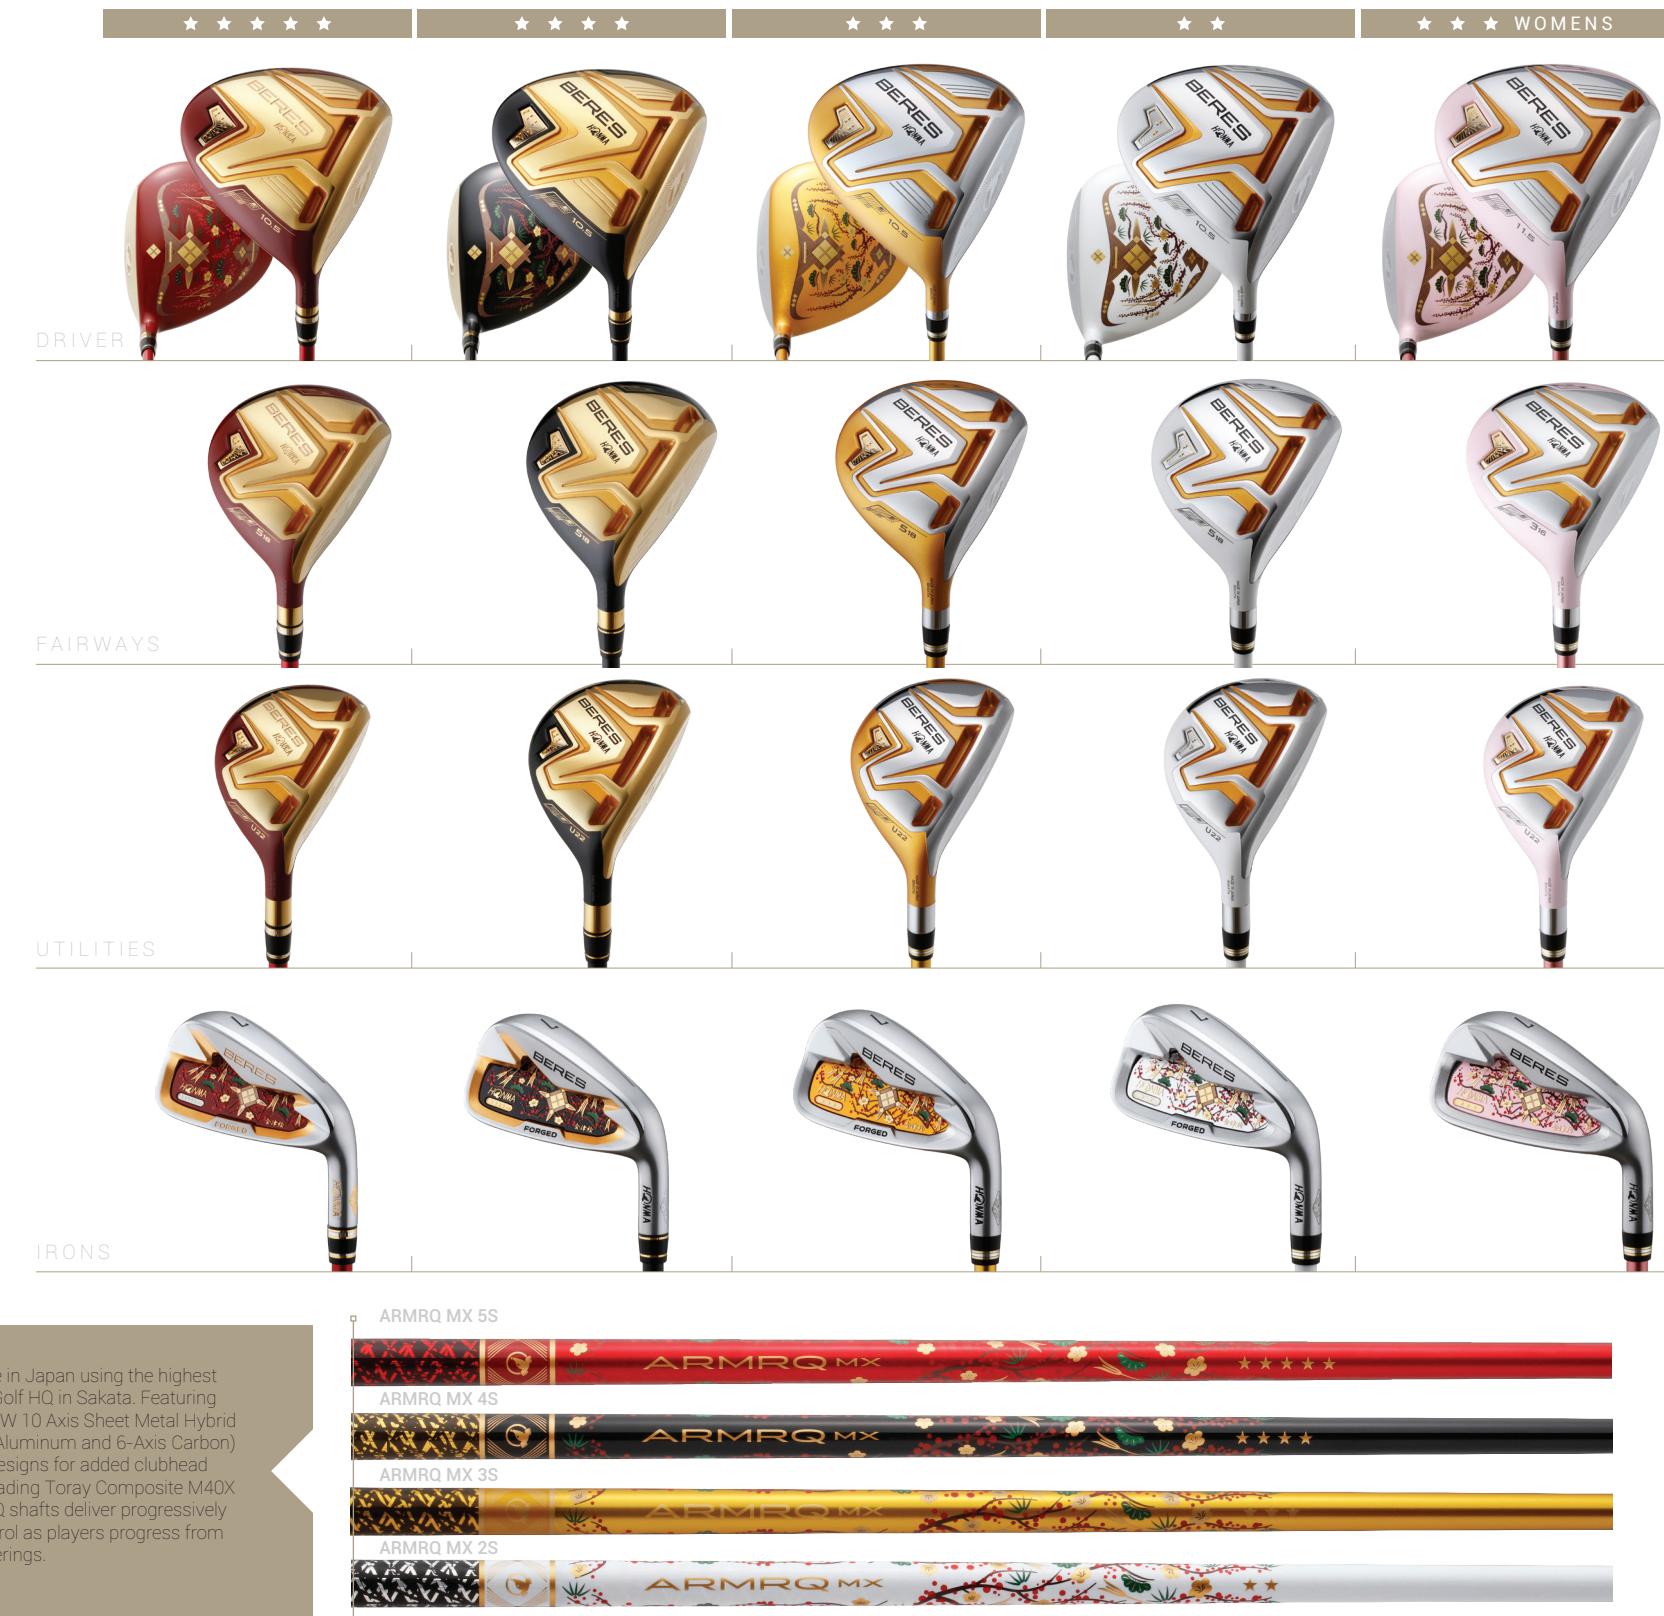

ARMRQ MX BLACK



ARMRQ MX shafts are Made in Japan using the highest quality materials at Honma Golf HQ in Sakata. Featuring proprietary designs using NEW 10 Axis Sheet Metal Hybrid Armour Technology (4-Axis Aluminum and 6-Axis Carbon) to deliver Counter-Balance designs for added clubhead speed, along with industry leading Toray Composite M40X and T1100G Carbon, ARMRQ shafts deliver progressively faster speed and added control as players progress from 2-Star, through to 5-Star offerings.

IRONS

Featuring a wide L-Cup Design utilizing New Ultra-Thin Face which uses Vertical Slits specifically arranged to improve the strength of the face insert to allow for maximum speed and forgiveness. Coupled with one external and two internal sole slots, as well as a Low-Deep Center of Gravity, BERES Irons are easy to launch high with strong carry distance. An 8620 Forged Body* delivers Honma's hallmark feel for the most discerning of players.



FOR MORE INFO SCAN QR CODE HERE or
VISIT HONMAGOLF.COM

SPECIFICATIONS

DRIVER

MENS

CLUB	1W		
LOFT (deg.)	9.5*	10.5*	11.5*
LIE (deg.)		60*	
HEAD VOLUME		460	
LENGTH (inch)		46"	
R2 (swingweight)	D1	D1	D1
R (swingweight)	D1	D1	D1
SR (swingweight)	D2	D2	D2
S (swingweight)	D2	D2	D2

WOMENS

CLUB	1W		
LOFT (deg.)	10.5*	11.5*	12.5*
LIE (deg.)		60*	
HEAD VOLUME		460	
LENGTH (inch)		44.25"	
L (swingweight)	C4	C2.5	C2.5
A (swingweight)	C5	C3.5	C3.5

FAIRWAYS

CLUB	3W	5W	7W
LOFT (deg.)	15*	18*	21*
LIE (deg.)	59.5*	60*	60.5*
HEAD VOLUME	185	174	165
LENGTH (inch)	43"	42.5"	42"
R2 (swingweight)	D0	D0	D0
R (swingweight)	D1	D1	D1
SR (swingweight)	D1	D1	D1
S (swingweight)	D1	D1	D1

CLUB	3W	5W	7W
LOFT (deg.)	16*	19*	22*
LIE (deg.)	59.5*	60*	60.5*
HEAD VOLUME	176	166	157
LENGTH (inch)	41.75"	41.25"	40.75"
L (swingweight)	C0.5	C0.5	C0.5
A (swingweight)	C1.5	C1.5	C1.5

UTILITIES

CLUB	19*	22*	25*	28*
LOFT (deg.)	19*	22*	25*	28*
LIE (deg.)		60		
HEAD VOLUME		133		
LENGTH (inch)	40.5"	40"	39.5"	39"
R2 (swingweight)	D0	D0	D0	D0
R (swingweight)	D0	D0	D0	D0
SR (swingweight)	D1	D1	D1	D1
S (swingweight)	D1	D1	D1	D1

CLUB	19*	22*	25*	28*
LOFT (deg.)	19*	22*	25*	28*
LIE (deg.)		60		
HEAD VOLUME		133		
LENGTH (inch)	39.5"	39"	38.5"	38"
L (swingweight)		C0.5		
A (swingweight)		C1.5		

IRONS

CLUB	#5	#6	#7	#8	#9	#10	#11	AW	SW
LOFT (deg.)	21*	24*	27*	31*	35*	40*	45*	50*	55*
LIE (deg.)	61*	61.5*	62*	62.5*	63*	63*	63*	63*	64*
OFFSET	4	3.7	3.5	3.5	3.5	3.5	3	3	2
LENGTH (inch)	38.25"	37.75"	37.25"	36.75"	36.25"	35.75"	35.5"	35.5"	35"
R2 (swingweight)	C9	C9	C9	C9	C9	C9	C9	C9	D0
R (swingweight)	C9	C9	C9	C9	C9	C9	C9	C9	D0
SR (swingweight)	D0	D0	D0	D0	D0	D0	D0	D0	D1
S (swingweight)	D0	D0	D0	D0	D0	D0	D0	D0	D1

CLUB	#5	#6	#7	#8	#9	#10	#11	SW
LOFT (deg.)	24*	27*	30*	34*	38*	43*	49*	56*
LIE (deg.)	61*	61.5*	62*	62.5*	63*	63*	63*	63.5*
OFFSET	4	3.5	3.5	3	3	3	3	2.5
LENGTH (inch)	37"	36.5"	36"	35.5"	35"	34.5"	34"	34"
L (swingweight)	C1	C1	C1	C1	C1	C1	C1	C2
A (swingweight)	C1	C1	C1	C1	C1	C1	C1	C2

SHAFTS

MODEL	Category	Decal	Flex	Shaft Weight	Grade	Kick Point
ARMRQ MX	Standard	AIZU	L	39	2S-5S	Mid-Low
	Custom	AIZU	A	41	2S-5S	Mid-Low
	Custom	AIZU	R2	42	2S-5S	Mid-Low
	Standard	AIZU	R	44	2S-5S	Mid-Low
	Standard	AIZU	SR	47	2S-5S	Mid-Low
ARMRQ MX DYNAMIC	Standard	AIZU	S	50	2S-5S	Mid-Low
	Custom Shaft	AIZU	R	49	2S-5S	Mid-High
	Custom Shaft	AIZU	SR	52	2S-5S	Mid-High
ARMRQ MX BLACK	Custom Shaft	AIZU	S	55	2S-5S	Mid-High
	Standard	Non-AIZU	R2	42	Non	Mid-Low
	Standard	Non-AIZU	R	44	Non	Mid-Low
	Standard	Non-AIZU	SR	46	Non	Mid-Low
	Standard	Non-AIZU	S	50	Non	Mid-Low

